
510130 FOR BS PIPE

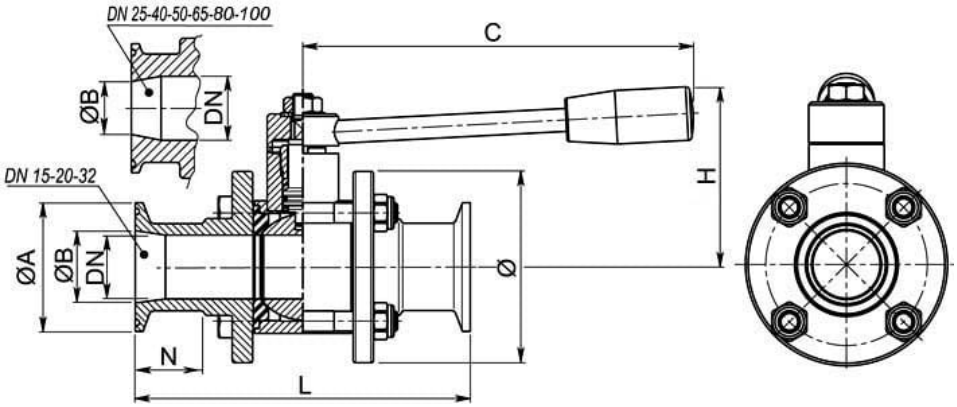


TWO-way ball valve, Three Pieces
Drive: Inox lever
Connection: **CLAMP normative DIN 32676 TAB.4 REIHE C**
According to normative BS/OD (ASTM A270) for TUBE
Flow: Full and reduced
Material: Aisi 316L (1.4404)
Measure: from 1/2″ to 4″
Seals: Virgin P.T.F.E.
Operating temperature: -20°C+160°C
Outer finish: Polished

On request:
Antistatic device ATEX II 2 G-D T4 zone 1-21
M.O.C.A. CE 1935/2004
• Seals made of:
PTFE with glass -20°C+170°C
PTFE with carbographite -20°C+180°C
PTFE with inox -20°C+200°C
UHMW High-molecular weight polyethylene -20°C+80°C


DN 25-40-50-65-80-100
C
ØB
DN
DN 15-20-32
H
ØA
ØB
DN
Ø
N
L


510130


CLAMP SERIE C DN/OD	DN	L	C	H	N	Ø	Ø A	Ø B	STAY BOLTS	SERRAGGIO TIRANTI (Nm)	PN	Kg	CODE AISI 316L
1/2"	10	95	110	55	19	55	25	9,4	6 x 45	4	64	-	510130 61210
3/4"	15	95	110	55	19	55	25	15,75	6 x 45	4	64	0,58	510130 61810
1"	20	106	110	60	19	60	50,5	22,1	6 x 50	4	40	-	510130 62410
1"	25	118	160	70	19	75	50,5	22,1	8 x 65	8	40	-	510130 62610
1" 1/2	32	126	160	80	19	85	50,5	34,8	8 x 70	10	25	1,78	510130 63210
1" 1/2	40	145	190	95	19	100	50,5	34,8	10 x 90	12	25	-	510130 63410
2"	50	165	190	100	19	120	64	47,5	10 x 100	13	25	-	510130 63810
2" 1/2	65	191	235	110	19	140	77,5	60,2	10 x 120	20	25	-	510130 64410
3"	80	208	285	130	27	165	91	72,9	10 x 140	20	16	-	510130 64810
4"	100	230	310	150	27	200	119	97,48	12 x170	22	16	-	510130 65410

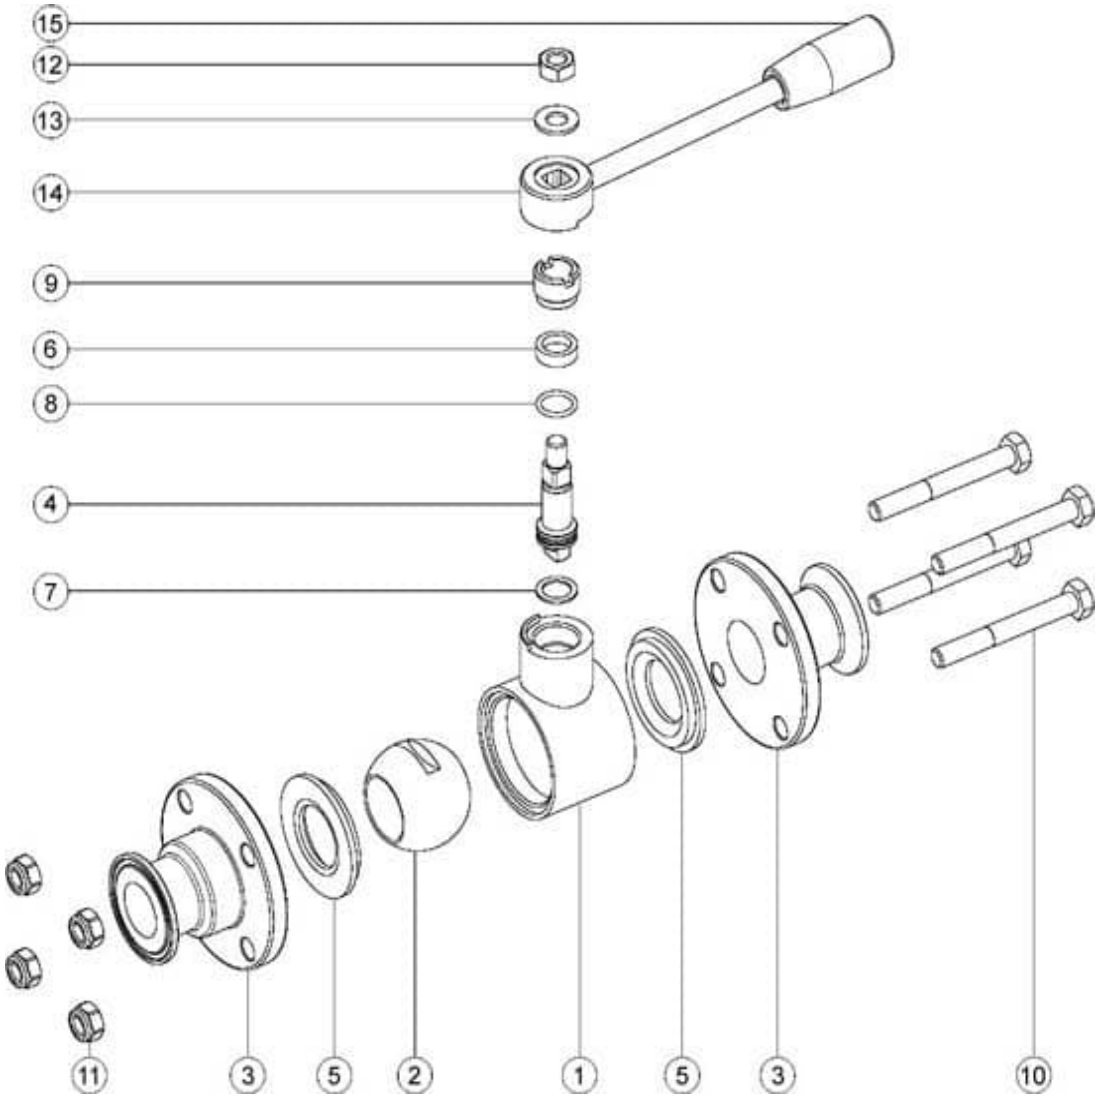

POS.	DENOMINATION	PCS	MAT.
1	Body	1	AISI 316L
2	Ball	1	AISI 316L
3	Sleeves	2	AISI 316L
4	Stem	1	AISI 316L
5	Ball Seals	2	PTFE
6	Stem Seal	1	PTFE
7	Stem Seal	1	PTFE
8	Stem or-Seal	1	FKM
9	Register ring	1	AISI 304L (303)
10	Stay bolt	4	AISI 304L
11	Self-clamping nut	4	AISI 304L
12	Nut	1	AISI 304L
13	Washer	1	AISI 304L
14	Lever	1	AISI 304L

15	Handle	1	DUROPLAST (PF)

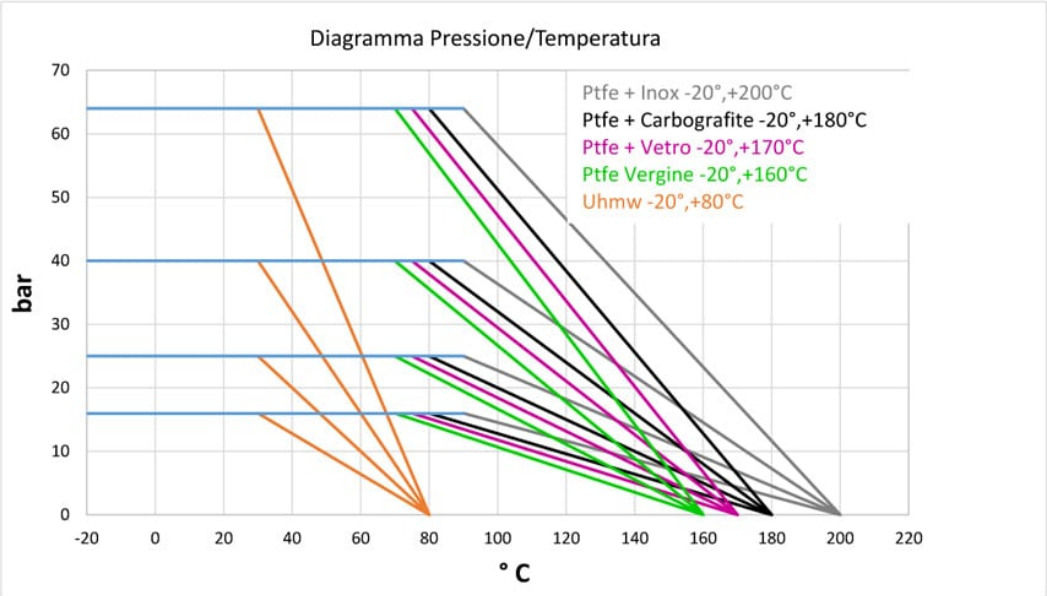
Diagramma Pressione/Temperatura
Ptfe + Inox -20°,+200°C
Ptfe + Carbografite -20°,+180°C
Ptfe + Vetro -20°,+170°C
Ptfe Vergine -20°,+160°C
Uhmw -20°,+80°C
bar
0
10
20
30
40
50
60
70
-20
0
20
40
60
80
100
120
140
160
180
200
220
° C

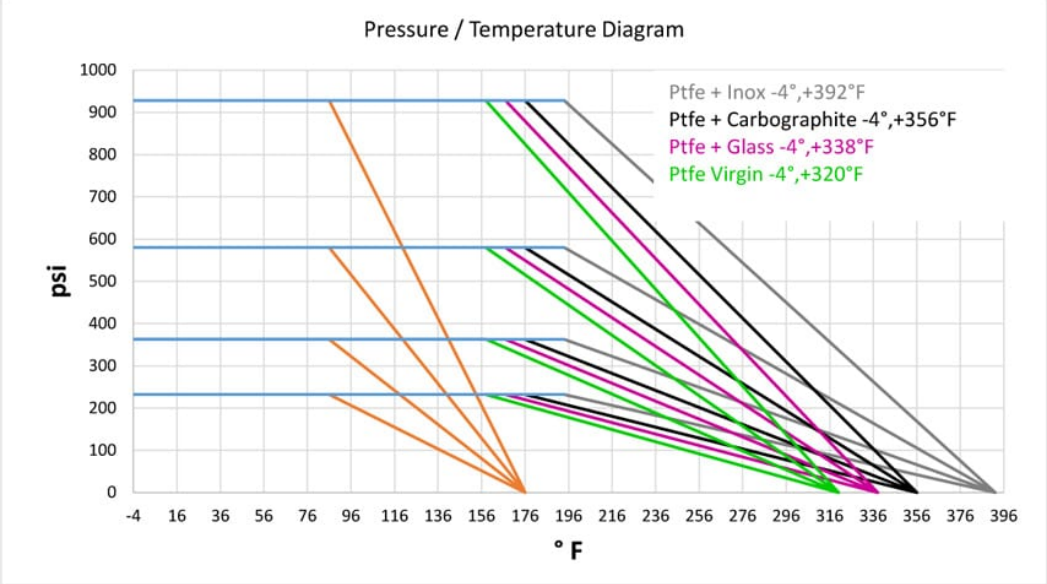
Pressure / Temperature Diagram
Ptfe + Inox -4°,+392°F
Ptfe + Carbographite -4°,+356°F
Ptfe + Glass -4°,+338°F
Ptfe Virgin -4°,+320°F
psi
0
100
200
300
400
500
600
700
800
900
1000
-4
16
36
56
76
96
116
136
156
176
196
216
236
256
276
296
316
336
356
376
396
° F